


2075S

15kV_{DC} / 5kV_{AC} - AWG12 - SILICONE DIELECTRIC

CONSTRUCTION

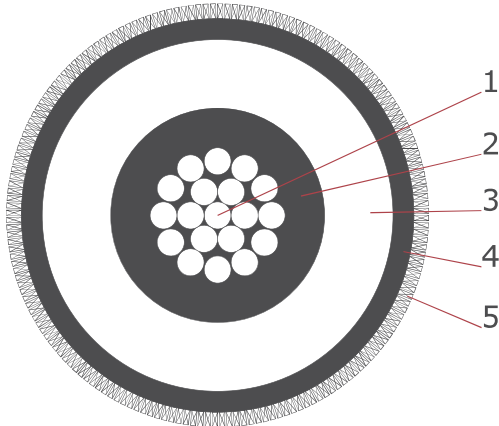

1. Conductor	AWG12 Cu/Ag (19xAWG25 s.p.c.)	3.1mm ² Ø 2.4mm
2. Semicon	Semiconductive Silicone (black)	Ø 3.6mm
3. Dielectric	Silicone	Ø 5.9mm ± 0.4mm
4. Semicon	Semiconductive Ink & Tape	Ø 6.6mm
5. Braid	Cu/Sn (AWG34 t.p.c.) 90% Coverage	Ø 7.1mm

TECHNICAL DATA

Rated Voltage	15kV _{DC} /5kV _{AC}
Impedance	typ. 25Ω
Capacitance	typ. 321pF/m
min. Bend Radius	25mm (fixed)
Operating Temperature	-65°C - +200°C
RoHS Compliant	Yes
Status	S [Special]

