


2232

10kV_{DC} / 3kV_{AC} - AWG6 - LDHMW PE DIELECTRIC

CONSTRUCTION

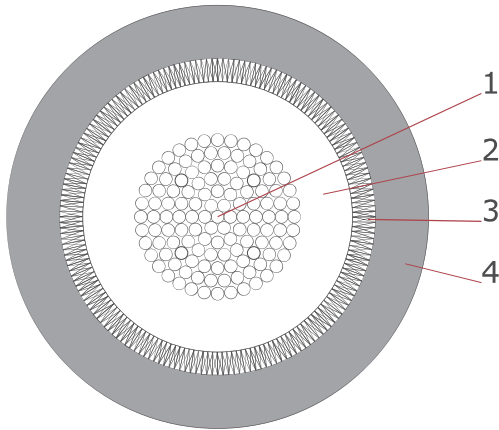

1. Conductor	AWG6 Cu/Sn (133xAWG27 t.p.c.)	13.6mm ² Ø 4.7mm
2. Dielectric	LDHMW PE	Ø 7.6mm ± 0.3mm
3. Braid	Cu/Sn (AWG30 t.p.c.) 95% Coverage	Ø 8.9mm
4. Jacket	TPR	Ø 12.7mm ± 0.5mm

TECHNICAL DATA

Rated Voltage	10kV _{DC} /3kV _{AC}
Impedance	typ. 14Ω
Capacitance	typ. 358pF/m
min. Bend Radius	152mm (fixed)
Operating Temperature	-51°C - +60°C
RoHS Compliant	Yes
Weight	ca. 0.298kg/m
Color	black
Status	S [Special]

