


HXC-60-1EA-8

60kV_{DC} - AWG14 - EPR (BLACK) DIELECTRIC

CONSTRUCTION

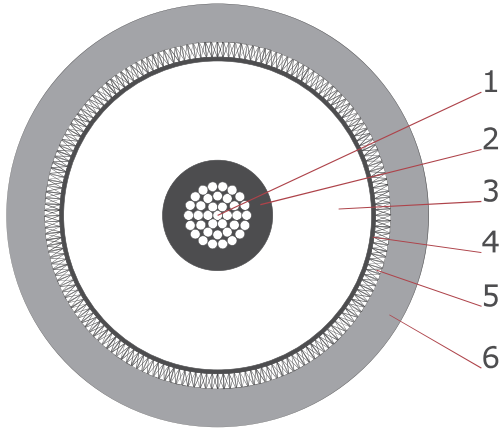

1. Conductor	AWG14 Cu/Sn (37xAWG30 t.p.c.)	2mm ² Ø 1.8mm
2. Semicon	Semiconductive tape and Semiconductive EPR (black)	Ø 2.9mm
3. Dielectric	EPR (black)	Ø 8.1mm
4. Semicon	Semiconductive tape (black)	Ø 8.3mm
5. Braid	Cu/Sn (mm t.p.c.) 95% Coverage	Ø 9.1mm
6. Jacket	PVC	Ø 11.1mm ± 0.5mm

TECHNICAL DATA

Rated Voltage	60kV _{DC}
Test Voltage	90kV _{DC} / 10min
Conductor Resistance @20°C	≤ 8.82 Ω/km
Capacitance	typ. 171pF/m
min. Bend Radius	45mm (moving), 22mm (fixed)
Operating Temperature	-10°C - +70°C
RoHS Compliant	Yes
Weight	ca. 0.18kg/m
Color	light grey
Status	P (Preferred)

