


2012

40kV_{DC} / (15)kV_{AC} - AWG18 - SILICONE DIELECTRIC

CONSTRUCTION

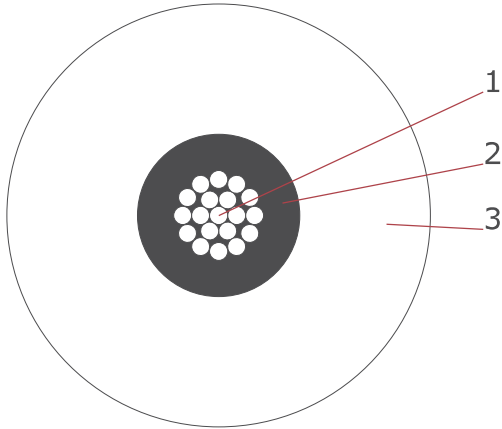

1. Conductor	AWG18 Cu/Ag (19xAWG30 s.p.c.)	0.96mm ² Ø 1.24mm
2. Semicon	Semiconductive Silicone (black)	Ø 2.3mm
3. Dielectric	Silicone	Ø 6mm ± 0.4mm

TECHNICAL DATA

Rated Voltage	40kV _{DC} /(15)kV _{AC}
min. Bend Radius	10mm (fixed)
Operating Temperature	-65°C - +200°C
RoHS Compliant	Yes
Weight	ca. 0.045kg/m
Color	white
Status	P (Preferred)

