


2024

60kV_{DC} / (20)kV_{AC} - AWG12 - SILICONE DIELECTRIC

CONSTRUCTION

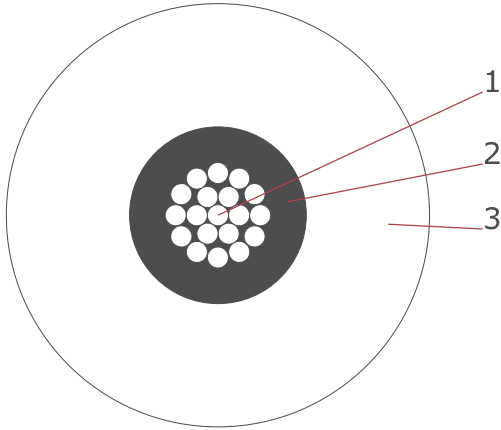

1. Conductor	AWG12 Cu/Ag (19xAWG25 s.p.c.)	3.1mm ² Ø 2.4mm
2. Semicon	Semiconductive Silicone (black)	Ø 3.8mm
3. Dielectric	Silicone	Ø 9.1mm ± 0.4mm

TECHNICAL DATA

Rated Voltage	60kV _{DC} /(20)kV _{AC}
min. Bend Radius	13mm (fixed)
Operating Temperature	-65°C - +200°C
RoHS Compliant	Yes
Weight	ca. 0.112kg/m
Color	white
Status	P (Preferred)

