
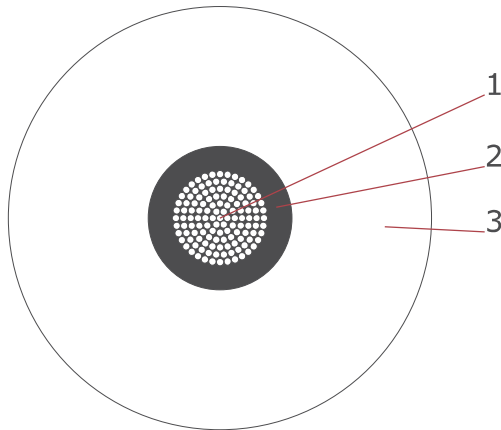


## 2062

100kV<sub>DC</sub> / (30)kV<sub>AC</sub> - AWG8 - SILICONE DIELECTRIC

### CONSTRUCTION

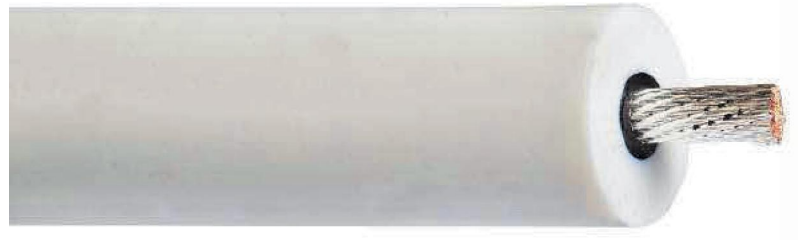

<b>1. Conductor</b>	AWG8 Cu/Ag (133xAWG29 s.p.c.)	8.5mm <sup>2</sup> Ø 3.7mm
<b>2. Semicon</b>	Semiconductive Silicone (black)	Ø 5.6mm
<b>3. Dielectric</b>	Silicone	Ø 16.5mm ± 0.3mm

### TECHNICAL DATA

<b>Rated Voltage</b>	100kV <sub>DC</sub> /(30)kV <sub>AC</sub>
<b>min. Bend Radius</b>	64mm (fixed)
<b>Operating Temperature</b>	-51°C - +200°C
<b>RoHS Compliant</b>	Yes
<b>Weight</b>	ca. 0.373kg/m
<b>Color</b>	white
<b>Status</b>	P (Preferred)

