


## 2075

15kV<sub>DC</sub> / (5)kV<sub>AC</sub> - AWG12 - SILICONE DIELECTRIC

### CONSTRUCTION

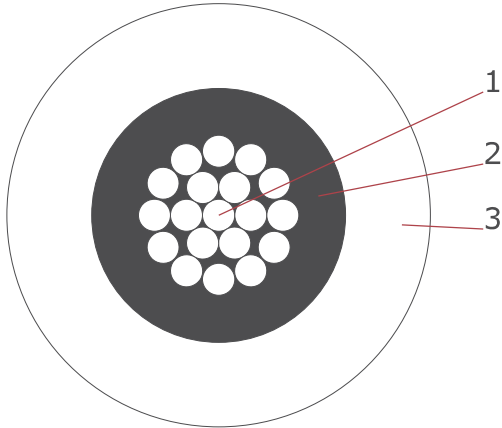

<b>1. Conductor</b>	AWG12 Cu/Ag (19xAWG25 s.p.c.)	3.1mm <sup>2</sup> Ø 2.4mm
<b>2. Semicon</b>	Semiconductive Silicone (black)	Ø 3.6mm
<b>3. Dielectric</b>	Silicone	Ø 6mm ± 0.4mm

### TECHNICAL DATA

<b>Rated Voltage</b>	15kV <sub>DC</sub> /(5)kV <sub>AC</sub>
<b>min. Bend Radius</b>	64mm (fixed)
<b>Operating Temperature</b>	-65°C - +200°C
<b>RoHS Compliant</b>	Yes
<b>Weight</b>	ca. 0.046kg/m
<b>Color</b>	white
<b>Status</b>	P (Preferred)

