
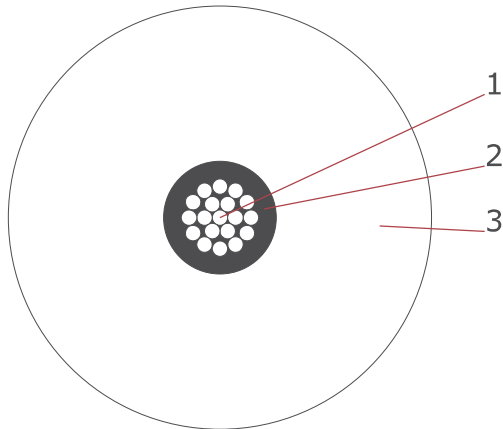


2121A

150kV_{DC} / (45)kV_{AC} - AWG12 - LDHMW PE DIELECTRIC

CONSTRUCTION

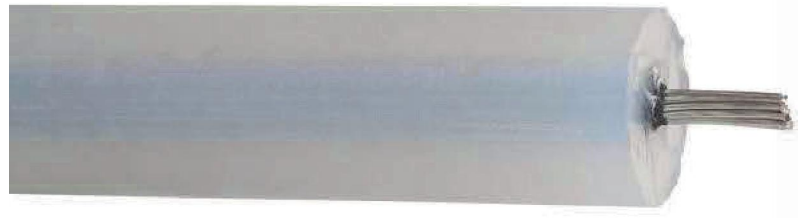

1. Conductor	AWG12 Cu/Sn (19xAWG25 t.p.c.)	3.1mm ² Ø 2.4mm
2. Semicon	Semiconductive PE (black)	Ø 3.3mm
3. Dielectric	LDHMW PE	Ø 12.4mm ± 0.3mm

TECHNICAL DATA

Rated Voltage	150kV _{DC} /(45)kV _{AC}
min. Bend Radius	178mm (fixed)
Operating Temperature	-51°C - +60°C
RoHS Compliant	Yes
Weight	ca. 0.127kg/m
Color	natural
Status	P (Preferred)

