


2124A

100kV_{DC} / (30)kV_{AC} - AWG16 - LDHMW PE DIELECTRIC

CONSTRUCTION

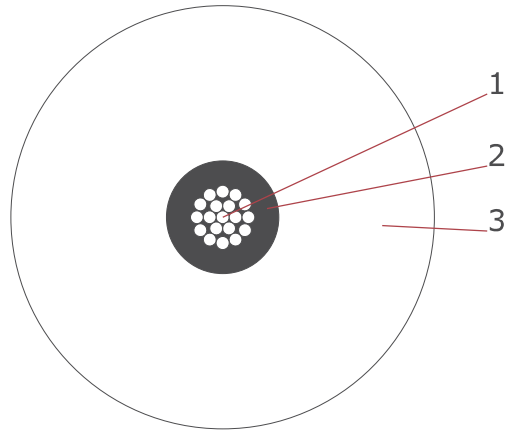

1. Conductor	AWG16 Cu/Sn (19xAWG29 t.p.c.)	1.2mm ² Ø 1.5mm
2. Semicon	Semiconductive PE (black)	Ø 2.5mm
3. Dielectric	LDHMW PE	Ø 9.4mm ± 0.3mm

TECHNICAL DATA

Rated Voltage	100kV _{DC} /(30)kV _{AC}
min. Bend Radius	127mm (fixed)
Operating Temperature	-51°C - +60°C
RoHS Compliant	Yes
Weight	ca. 0.075kg/m
Color	natural
Status	P (Preferred)

