


## 2125A

100kV<sub>DC</sub> / (30)kV<sub>AC</sub> - AWG12 - LDHMW PE DIELECTRIC

### CONSTRUCTION

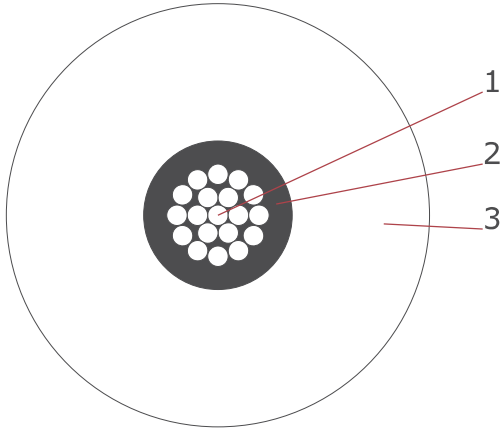

<b>1. Conductor</b>	AWG12 Cu/Sn (19xAWG25 t.p.c.)	3.1mm <sup>2</sup> Ø 2.4mm
<b>2. Semicon</b>	Semiconductive PE (black)	Ø 3.3mm
<b>3. Dielectric</b>	LDHMW PE	Ø 9.4mm ± 0.3mm

### TECHNICAL DATA

<b>Rated Voltage</b>	100kV <sub>DC</sub> /(30)kV <sub>AC</sub>
<b>min. Bend Radius</b>	127mm (fixed)
<b>Operating Temperature</b>	-51°C - +60°C
<b>RoHS Compliant</b>	Yes
<b>Weight</b>	ca. 0.089kg/m
<b>Color</b>	natural
<b>Status</b>	S [Special]

