


2132

15kV_{DC} / (3)kV_{AC} - AWG6 - SILICONE DIELECTRIC

CONSTRUCTION

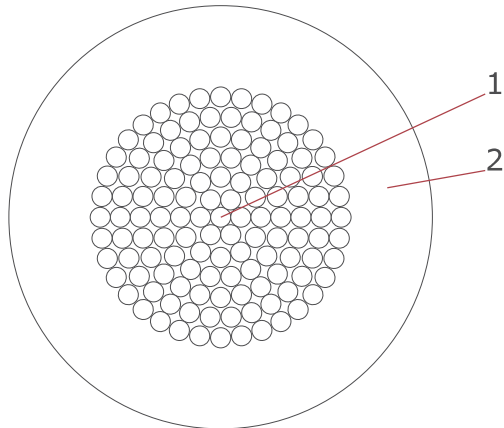

| | | |
|----------------------|-------------------------------|--------------------------------|
| 1. Conductor | AWG6 Cu/Sn (133xAWG27 t.p.c.) | 13.6mm ² Ø 4.7mm |
| 2. Dielectric | Silicone | Ø 7.6mm ± 0.4mm |

TECHNICAL DATA

| | |
|------------------------------|---|
| Rated Voltage | 15kV _{DC} /(3)kV _{AC} |
| Test Voltage | 12.5kV _{AC} (Spark Test) |
| min. Bend Radius | 114mm (moving), 57mm (fixed) |
| Operating Temperature | -50°C - +149°C |
| RoHS Compliant | Yes |
| Weight | ca. 0.161kg/m |
| Color | white |
| Status | P (Preferred) |

