


## 2149

60kV<sub>DC</sub> / (20)kV<sub>AC</sub> - AWG18 - LDHMW PE DIELECTRIC

### CONSTRUCTION

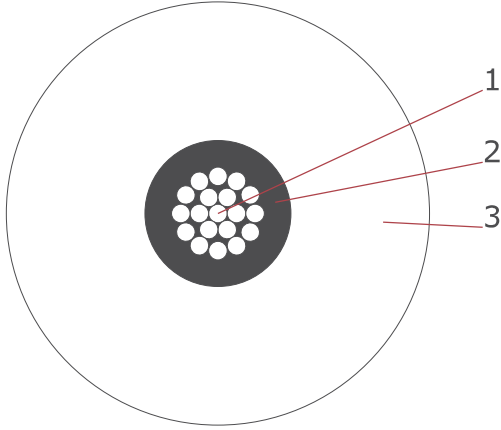

<b>1. Conductor</b>	AWG18 Cu/Sn (19xAWG30 t.p.c.)	0.97mm <sup>2</sup> Ø 1.25mm
<b>2. Semicon</b>	Semiconductive PE (black)	Ø 2mm
<b>3. Dielectric</b>	LDHMW PE	Ø 5.8mm ± 0.3mm

### TECHNICAL DATA

<b>Rated Voltage</b>	60kV <sub>DC</sub> / (20)kV <sub>AC</sub>
<b>Test Voltage</b>	70kV <sub>DC</sub> / 10min
<b>min. Bend Radius</b>	64mm (fixed)
<b>Operating Temperature</b>	-51°C - +60°C
<b>RoHS Compliant</b>	Yes
<b>Weight</b>	ca. 0.03kg/m
<b>Color</b>	natural
<b>Status</b>	P (Preferred)

