


2178

30kV_{DC} - AWG20 - SILICONE DIELECTRIC

CONSTRUCTION

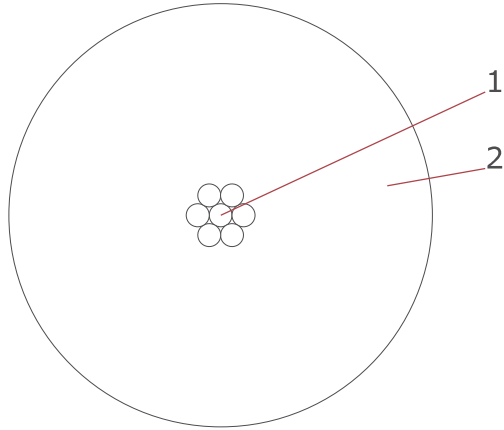

1. Conductor	AWG20 Cu/Sn (10xAWG30 t.p.c.)	0.51mm ² Ø 0.89mm
2. Dielectric	Silicone	Ø 4.7mm ± 0.3mm

TECHNICAL DATA

Rated Voltage	30kV _{DC}
min. Bend Radius	10mm (fixed)
Operating Temperature	-65°C - +149°C
RoHS Compliant	Yes
Weight	ca. 0.03kg/m
Color	white
Status	P (Preferred)

