


2185R

20kV_{DC} - AWG20 - SILICONE DIELECTRIC

CONSTRUCTION

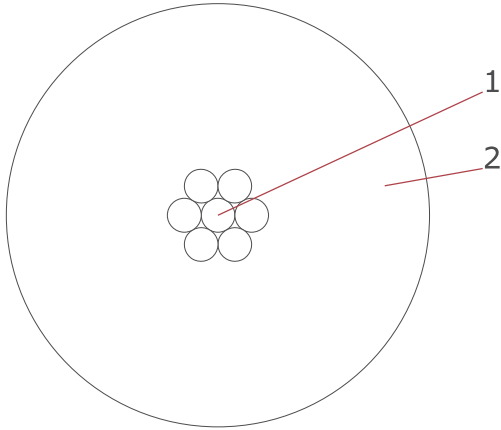

1. Conductor	AWG20 Cu/Sn (10xAWG30 t.p.c.)	0.51mm ² Ø 0.89mm
2. Dielectric	Silicone	Ø 3.2mm ± 0.3mm

TECHNICAL DATA

Rated Voltage	20kV _{DC}
min. Bend Radius	13mm (fixed)
Operating Temperature	-65°C - +149°C
RoHS Compliant	Yes
Weight	ca. 0.015kg/m
Color	red
Status	P (Preferred)

The cable has been spark tested according to UL758 during production. It is recommended to derate the operating voltage for continuous operation. The user has to ensure by adequate tests that the cable is suitable for his application.

